

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
PORTIONS OF THE SOUTH AND WEST BOUNDARIES,

A PORTION OF THE SUBDIVISION,

AND

THE SUBDIVISION OF SECTIONS 19, 20, 30, AND 31,

IN

TOWNSHIP 22 SOUTH, RANGE 1 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Jeremy D. Davis
Cadastral Surveyor

Under Special Instructions dated and approved ***July 28, 2010***, which provided for the surveys included under Group Number ***1086***; Assignment Instructions dated ***July 28, 2010***, and Reassignment Instructions dated ***November 4, 2011***.

Survey Commenced, ***July 28, 2010***
Survey Completed, ***May 4, 2011***

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
PORTIONS OF THE SOUTH AND WEST BOUNDARIES,

A PORTION OF THE SUBDIVISION,

AND

THE SUBDIVISION OF SECTIONS 19, 20, 30, AND 31,

IN

TOWNSHIP 22 SOUTH, RANGE 1 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Jeremy D. Davis
Cadastral Surveyor

Under Special Instructions dated and approved ***July 28, 2010***, which provided for the surveys included under Group Number ***1086***; Assignment Instructions dated ***July 28, 2010***, and Reassignment Instructions dated ***November 4, 2011***.

Survey Commenced, ***July 28, 2010***
Survey Completed, ***May 4, 2011***

INDEX DIAGRAM

Township 22 South, Range 1 West.

6	5	4	3	2	1
7	8	9	10	11	12
8 18	17	16	15	14	13
19	18				
7 19	17 20	9 21	22	23	24
16	15				
7 30	13 29	28	27	26	25
15					
6 31	11 32	33	34	35	36
4					

The Subdivision of Section 19.....Page 20
The Subdivision of Section 20.....Page 20
The Subdivision of Section 30.....Page 25
The Subdivision of Section 31.....Page 27

TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the south and west boundaries, a portion of the subdivision, and the subdivision of sections 19, 20, 30, and 31, in T. 22 S., R. 1 W., Salt Lake Meridian, Utah.

HISTORY OF SURVEYS

Surveyed by			Retr. or Resurveyed by		
SOUTH BOUNDARY					
Portion	A.D. Ferron	1878			
All	H.D. Page & G.C. Swan	1897	H.D. Page & G.C. Swan		1897
Portion			C.P. Sylvester		1967
Portion			J.D. Davis		2010
Portion			R.K. Baugh & C.F. Norton		2008-09
EAST BOUNDARY (Salt Lake Meridian)					
All	T.C. Bailey & J.G. Burrill	1874			
Portion			H.D. Page & G.C. Swan		1897
All			R.C. Yundt		1946
All			C.P. Sylvester		1967
WEST BOUNDARY					
Portion	C. Mogo	1856			
Portion	A.D. Ferron	1878	A.D. Ferron		1878
Portion			J.T. Breckon		1896
Portion			H.D. Page & G.C. Swan		1897
Portion			C.P. Sylvester		1967
Portion			G.E. Reynolds		1988
NORTH BOUNDARY					
Portion	C. Mogo	1856			
All	A.D. Ferron	1878	A.D. Ferron		1878
Portion			C.P. Sylvester		1967
Portion			G.E. Reynolds		1988
SUBDIVISION					
Portion	C. Mogo	1856			
Portion	A.D. Ferron	1878			
Portion	H.D. Page & G.C. Swan	1897	H.D. Page & G.C. Swan		1897
Portion			C.P. Sylvester		1967
Portion			G.E. Reynolds		1988

STATE OF UTAH

Utah Dept. of Highway, State Highway 89, 1952, Plan and Profile Sheets.

Utah Dept. of Transportation, Sigard to Salina Right-of-Way Plan Sheet, 05/20-27/1981, Sheets 9-13.

SEVIER COUNTY

The Sevier County Surveyor's Office has perpetuated numerous corners in the township with corner perpetuation and filing records located at the Sevier County Recorder's Office.

TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

PRIVATE SURVEYS

Allen's Engineering, File No. 195760, 10/03/1978, Vermillion Estates
Subdivision Plat.

D&RG Railroad Right-of-Way map, Map No. UTAH V.6 9&10, 1919.

Jones and DeMille Engineering, File No. 514, 09/18/2000, Amended Wilson
Property Survey, Section 18.

Jones and DeMille Engineering, File No. 00077, 07/14/1992, U.S. Gypsum
Boundary Survey, SW Corner of Section 31.

Magleby & Associates, Inc., File No. B-891, 02/24/08, Part of T. 22 S., Rs.
1 & 2 W., Salt Lake Meridian, Utah

Note: This survey was done in cooperation with Sevier County, represented by
Registered Land Surveyor, Ryan Savage.

TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 1086, dated July 28, 2010.

The direction of the lines was determined by references to true meridian, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards for the Positional Accuracy of Cadastral Surveys When Using Global Navigation Satellite Systems (GNSS)*, dated February 23, 2009. Trimble model 5800 receivers were used for field collection. Cadastral Automated Plat Drafting (CAPD) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data were thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations, post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS): DH3864 P105 DELTAMUNI_UT2004 CORS ARP, DI2242 P009 MARYSVALE_UT2006 CORS ARP, and CQ6018 MIDV MIDVALE CORS ARP.

The geographic position of the section corner of sections 29 and 32 only, T. 22 S., R. 1 W., as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°51'12.673" N.**,
Longitude: **111°56'33.186" W.**, N.A.D. 83,
Network Accuracy = 0.200 meters at 95% confidence.

The geographic position of the corner of sections 16, 17, 20, and 21, T. 22 S., R. 1 W., as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°53'04.427" N.**,
Longitude: **111°55'22.723" W.**, N.A.D. 83,
Network Accuracy = 0.200 meters at 95% confidence.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the South Boundary,
T. 22 S., R. 1 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by A.D. Ferron in 1878,
and the Resurveys Executed by H.D. Page and G.C. Swan in 1897,
and C.P. Sylvester in 1967

Beginning at the point for the corner of Tps. 22 and 23 S., Rs. 1 and 2 W., perpetuated from original evidence no longer in existence, at distance/distance intersection from reference monuments; there is no remaining evidence of the original corner position. Point falls under a gypsum plant waste-rock pile.

Note: Ryan Savage, Sevier County Land Surveyor, stated that this corner was referenced in 2004, when the 1967 iron post was still existent. This position is accepted as a careful and faithful perpetuation of the original corner position.

From which

A Sevier County survey monument, an aluminum pipe, 3 inches diameter, firmly set, projecting 4 inches above the ground, for a reference monument, bears N. 40°12.0' E., 213.5 links distance, with aluminum cap marked SEVIER COUNTY UTAH SURVEY MONUMENT R2W S36 S1 R1W S31 S6 T23S 2004, with an arrow pointing toward the point and RM and 140.89 marked along it.

A Sevier County survey monument, an aluminum pipe, 3 inches diameter, firmly set, projecting 2 inches above the ground, for a reference monument, bears S. 45°21.9' E., 213.4 links distance, with aluminum cap marked SEVIER COUNTY UTAH SURVEY MONUMENT R2W S36 S1 R1W S31 S6 T23S 2004, with an arrow pointing toward the point and RM and 140.85 marked along it.

From this point, the 1/4 section corner of sections 1 and 6, T. 23 S., Rs. 1 and 2 W., bears S. 0°28.8' E., 41.263 chains distance, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 9 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey; with a steel fence post located alongside the iron post.

Corner falls on an east-facing slope.

S. 88°39.8' E., between sections 6 and 31.

- 17.338** Point for the W 1/16 section corner of section 31 only, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, in a mound of stone, 2 ft. base to top of aluminum cap marked as described in the official record of the 2010 resurvey; with a steel fence post alongside the corner.

Corner is located on a gentle north-facing slope on open ground.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 37.222** The 1/4 section corner of section 31 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 11 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1967 resurvey.

Corner is located on a steep, west-facing slope on open ground with sagebrush and lava rock outcrops.

S. 88°24.6' E., beginning new measurement.

- 1.560** The 1/4 section corner of section 6 only, T. 23 S., R. 1 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 11 inches above a mound of stone, 2 1/2 ft. base, with brass cap marked as described in the official record of the 1967 resurvey.

Rehabilitate mound of stone, 4 ft. base to top of brass cap.

Corner is located on a steep, north-facing slope on open ground with sagebrush and lava rocks.

S. 88°35.4' E., beginning new measurement.

- 38.127** The corner of sections 31 and 32 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, in a mound of stone, 2 1/2 ft. base to top of brass cap marked as described in the official record of the 1967 resurvey.

A Sevier County survey monument, an iron pipe, 1 1/2 inches diameter, firmly set, projecting 7 inches above the ground, with a brass cap marked SEVIER COUNTY UTAH SURVEY MONUMENT 31 32, is located alongside the corner.

Corner is located on an east-facing slope on open ground with scattered juniper trees.

S. 81°45.3' E., between sections 6 and 32.

- 1.571** The corner of sections 5 and 6 only, T. 23 S., R. 1 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 7 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey.

A mound of stone (not of record), 2 ft. base by 8 inches high, is located southwest of the corner; with a steel fencepost located east of the corner.

A Sevier County survey monument, an iron pipe, 1 1/2 inches diameter, firmly set, projecting 5 inches above the ground, with brass cap marked SEVIER COUNTY UTAH SURVEY MONUMENT 6 5, is located alongside the corner.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located on level ground in a bowl opening to the north.

Dependent Resurvey of a Portion of the West Boundary,
T. 22 S., R. 1 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by C. Mogo in 1856, and the
Resurvey Executed by H.D. Page and G.C. Swan in 1897

From the point for the corner of Tps. 22 and 23 S., Rs. 1 and 2
W., hereinbefore described.

N. 0°44.7' W., between sections 31 and 36.

20.343 Point for the S 1/16 section corner of sections 31 and 36.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25
inches in the ground, magnet at base, with aluminum cap marked:

S 1/16
S36 | S31
2010

Set a steel fence post alongside the corner.

Corner is located on a level ground in dense brush.

40.686 Point for the 1/4 section corner of sections 31 and 36, at
proportionate distance; there is no remaining evidence of the
original corner position.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28
inches in the ground, magnet at base, with aluminum cap marked:

T22S
1/4
R2W R1W
S36 | S31
2010

Set a steel fence post alongside the corner.

Corner is located on a level open ground.

61.029 Point for the 1/4 section corner of sections 31 and 36. Point
falls in Rocky Ford Reservoir; no permanent monumentation
established.

81.372 Point for the corner of sections 25, 30, 31, and 36, at
proportionate distance. Point falls in Rocky Ford Reservoir; no

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

permanent monumentation established.

N. 0°44.7' W., between sections 25 and 30.

- 20.343** Point for the S 1/16 section corner of sections 25 and 30. Point falls in Rocky Ford Reservoir; no permanent monumentation established.
- 40.686** Point for the 1/4 section corner of sections 25 and 30, at proportionate distance; there is no remaining evidence of the original corner position. Point falls in a cultivated field, where it is not suitable for permanent monumentation; not monumented.
- 61.029** Point for the N 1/16 section corner of sections 25 and 30; not monumented.
- 81.372** The corner of sections 19, 24, 25, and 30, monumented with a Sevier County survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, flush with a mound of stone, 2 ft. base, 11 inches high, with aluminum cap marked SEVIER COUNTY UTAH SURVEY MONUMENT T22S SLB&M R2W S24 S25 R1W S19 S30 2010.

Note: Ryan Savage, Sevier County Land Surveyor, stated that Allen B. Cummings, LS 4505, found evidence of the position of the original corner in 1978, and set a brass cap at the corner that has subsequently disappeared. Mr. Savage was able to relocate the position from the notes of the Vermillion Cliffs Subdivision Plat, File No. 195760, by Allen's Engineering, with descriptions of ties made to the brass cap, and set a county monument at that location.

This corner has been verified by the Sevier County surveyor, the local surveying community, and the adjoining landowners, and is accepted as a careful and faithful perpetuation of the original corner position.

A steel fence post is located alongside the corner.

N. 0°53.3' W., between sections 19 and 24.

- 41.159** Point for the 1/4 section corner of section 19 and 24, at proportionate distance; there is no remaining evidence of the original corner position.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, in a mound of stone, 1 1/2 ft. base to top of aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T22S
R2W R1W
 | 1/4
S24 | S19
 2010

From the corner, a rebar (not of record), 5/8 inches diameter, firmly set, projecting 2 inches above the ground, with a yellow plastic cap, 1 1/4 inches diameter, marked PLS 183343, at the intersection of fences extending west and south, bears S. 79° W., 56.5 links distance.

From the corner, a fence on the northwesterly boundary of Interstate Highway 70 right-of-way, extending N. 68° E., and S. 68° W., bears South, 57.6 links distance.

Set a steel fence post alongside the corner.

Corner is located in a previously cultivated field overgrown with Russian thistle.

- 82.318** True point for the corner of sections 13, 18, 19, and 24; there is no remaining evidence of original corner. Point falls in a cultivated field, where it is not suitable for permanent monumentation.

From this true point, the witness corner to the corner of sections 13, 18, 19, and 24, bears N. 88°39.9' E., 3.742 chains distance, monumented with a Sevier County survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 5 inches above the ground, with aluminum cap marked SEVIER COUNTY UTAH SURVEY MONUMENT T22S R2W S13 S24 R1W S18 S19 2008, with an arrow pointing toward the true point with WC and 247 FT marked along it.

This corner is accepted as a careful and faithful perpetuation of the original corner position.

Reestablishment of the Survey Executed by C. Mogo in 1856

N. 0°46.6' W., between sections 13 and 18.

- 40.389** Point for the 1/4 section corner of section 13, at intersection with the E-W centerline of section 13, T. 22 S., R. 2 W., as determined latitudinally by a long-established gravel farm road, and a line of occupation.

Set a steel spike, 10 inches long, 6 inches below the grade of 4300 South, a gravel county road.

From which

An aluminum post, 30 inches long, 2 1/2 inches diameter, set

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

26 inches in the ground, magnet at base, for a reference monument, bears N. $18^{\circ}53.6'$ E., 0.356 chains distance, in a mound of stones, 2 ft. base to top of aluminum cap marked RM T22S R1W S18 2011, with an arrow pointing toward the point and 23.47 FT. TO COR. marked along it.

An aluminum post, 30 inches long, 2 1/2 inches diameter, set 27 inches in the ground, magnet at base, for a reference monument, bears N. $48^{\circ}50.9'$ W., 0.483 chains distance, in a mound of stones, 2 ft. base to top of aluminum cap marked RM T22S R2W S13 2011, with an arrow pointing toward the point and 31.85 FT. TO COR. marked along it.

Reference monuments are located in the north right-of-way of the gravel county road, extending east and west, 41 links wide, in a new barbed wire fence with railroad ties for posts.

- 69.372 The corner of sections 7, 12, 13, and 18, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 10 inches above a mound of stone, 4 ft. base, 1 ft. high, with brass cap marked as described in the official record of the 1967 resurvey.

Rehabilitate mound of stone, 4 ft. base to top of brass cap.

From the corner, a fence extending northerly and southerly, bears West, 29 links distance.

Corner is located on level, open ground with sagebrush.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 22 S., R. 1 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by A.D. Ferron in 1878

From the corner of sections 20 and 21 only, monumented with a stone, 13x11x7 inches, firmly set, in a mound of stone, 2 ft. base, 8 inches high, marked with 2 notches on south edge, 4 notches on east edge, and SC on east face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

T22S R1W

S20	S21
-----	-----

S29

2010

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Bury original stone alongside the corner.

Set a steel fence post alongside the corner.

Corner is located on a steep, southwest-facing slope in loose soil with boulders.

N. 7°33.0' E., between sections 20 and 21.

22.624 The S 1/16 section corner of sections 20 and 21; not monumented.

45.248 The 1/4 section corner of sections 20 and 21, monumented with a lava stone, 17x8x8 inches, marked 1/4 on west face, with a mound of stone, 3 ft. base, 1 ft. high, located east of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

T22S R1W
1/4
S20 | S21
2010

Bury original stone alongside the corner.

Set a steel fence post alongside the corner.

Rehabilitate mound of stone.

Corner is located on a gentle, northeast-facing slope on open ground.

N. 1°42.2' W., beginning new measurement.

20.095 Point for the N 1/16 section corner of sections 20 and 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

N 1/16
S20 | S21
2010

Set a steel fence post alongside the corner.

Corner is located on level, open ground with scattered sagebrush and grasses.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 40.190** The corner of sections 16, 17, 20, and 21, monumented with a sandstone, 9x10 inches, firmly set, projecting 11 inches above the ground, marked with 3 notches on south edge, 4 notches on east edge, with a mound of stone, 2 ft. base by 8 inches high, located west of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a mound of stone, 1 1/2 ft. base to top of aluminum cap marked:

T22S R1W

S17		S16
—		
S20		S21

2010

Bury original stone alongside the corner.

Set a steel fence post alongside the corner.

Rehabilitate mound of stone.

From the corner, an old barbed-wire fence extending east and west, bears South, 1 1/2 links distance.

Corner is located on level, open ground with sparse vegetation.

Reestablishment of the Survey Executed by
H.D. Page and G.C. Swan in 1897

From the corner of sections 31 and 32 only, on the south boundary of the township, hereinbefore described.

N. 0°05.4' W., between sections 31 and 32.

- 39.984** Point for the 1/4 section corner of section 32 only, at proportionate distance; there is no remaining evidence of the original corner position.

Note: This 1/4 corner was described as common to sections 31 and 32 in the 1897 survey.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 29 inches in the ground, magnet at base, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T22S R1W

1/4

| S32

2010

From the corner, a small cliff, extending N. 35° W. and S. 35° E, bears South, 7.6 links distance.

Set a steel fence post alongside the corner.

Corner is located south of a narrow ridge.

- 41.006** Point for the 1/4 section corner of section 31 only, at proportionate distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, with aluminum cap marked:

T22S R1W

1/4

S31 |

2010

Set a steel fence post alongside the corner.

Corner is located on the steep, southwest-facing slope of a narrow ridge, approximately 15 ft. beneath the top.

- 79.968** The corner of sections 29 and 32 only, monumented with a sandstone, 13x4 inches, firmly set, projecting 9 inches above a mound of stone, 4 ft. base, marked with 1 groove on south face, 5 grooves on east face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, magnet at base, in a mound of stone, 3 1/2 ft. base to top of aluminum cap marked:

T22S R1W

| S29
| S32

2010

Bury original stone alongside the corner.

Set a steel fence post alongside the corner.

Corner is located on a steep, south-facing slope on open ground

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

with no vegetation.

N. 0°04.1' E., on the west boundary of section 29.

- 2.044 The closing corner of sections 30 and 31 only, monumented with a sandstone, 15x8x6 inches, lying on the ground, marked with 1 groove on south face, 1 groove on east face, and CC on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

T22S R1W

S30	
C	
C	
S31	

2010

Bury original stone alongside the corner.

Set a steel fence post alongside the corner.

Corner is located on a steep, southwest-facing slope on open ground in boulder field with sparse vegetation.

- 39.060 The 1/4 section corner of section 29 only, monumented with a stone, 13x7 inches, firmly set, projecting 15 inches above the ground, marked 1/4 on west face.

Note: This 1/4 corner was described as common to sections 29 and 30 in the 1897 survey.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, magnet at base, in a mound of stone, 4 ft. base to top of aluminum cap marked:

T22S R1W

1/4	
	S29

2010

Bury original stone alongside the corner.

Set a steel fence post alongside the corner.

Corner is located on a very steep, west-facing slope, with loose rock and sagebrush.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°03.3' E., beginning new measurement.

- 4.718 Point for the 1/4 section corner of section 30 only, at proportionate distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, magnet at base, in a mound of stone, 4 ft. base to top of brass cap marked:

T22S R1W

1/4

S30

2010

Set a steel fence post alongside the corner.

Corner is located on a steep, northwest-facing slope with rocky outcrops and sagebrush.

-
- 46.452 The corner of sections 19, 20, 29, and 30, monumented with a stone, 10x10 inches, firmly set, projecting 8 inches above a supporting mound of stone, 2 1/2 ft. base by 6 inches high, marked with 2 notches on south edge, 5 notches on east edge, with a mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, located west of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a mound of stone, 2 1/2 ft. base top of aluminum cap marked:

T22S R1W

S19 | S20

—+—
S30 | S29

2010

Bury original stone alongside the corner.

Set a steel fence post alongside the corner.

Rehabilitate mound of stone.

Corner is located on a steep, open, and rocky south-facing slope.

Reestablishment of the Survey Executed by C. Mogo in 1856,
and the Resurvey Executed by H.D. Page and G.C. Swan in 1897

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

From the point for the corner of sections 25, 30, 31, and 36, on the west boundary of the township, hereinbefore described.

S. $89^{\circ}06.8'$ E., between sections 30 and 31.

19.903 Point for the W 1/16 section corner of sections 30 and 31.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 27 inches in the ground, magnet at base, with aluminum cap marked:

T22S R1W

S30
W 1/16 ———
S31

2010

Set a steel fence post alongside the corner.

Corner is located on level, open ground.

39.806 Point for the 1/4 section corner of sections 30 and 31, at proportionate distance; there is no remaining evidence of the original corner position.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, magnet at base, with aluminum cap marked:

T22S R1W

S30
1/4 ———
S31

2010

Set a steel fence post alongside the corner.

Corner is located on level, open ground.

Reestablishment of the Survey Executed by A.D. Ferron in 1878, and
the Resurvey Executed by H.D. Page and G.C. Swan in 1897

77.811 The closing corner of sections 30 and 31 only.

Reestablishment of the Survey Executed by A.D. Ferron in 1878,
and the Resurvey Executed by H.D. Page and G.C. Swan in 1897

From the corner of sections 20 and 21 only.

S. $89^{\circ}31.6'$ W., between sections 20 and 29.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 19.940 Point for the E 1/16 of section 20 only; not monumented.
- 39.880 The 1/4 section corner of sections 20 only, monumented with a stone, 7x5 inches, firmly set, projecting 15 inches above a supporting mound of stone, 2 ft. base, 6 inches high, marked 1/4 on east face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a mound of stone, 2 1/2 ft. base to top of aluminum cap marked:

T22S R1W
S20
1/4 —————
2010

Bury original stone alongside the corner.

Set a steel fence post alongside the corner.

Corner is located on a southwest-facing slope with scattered juniper trees west of the corner.

S. 89°18.3' W., beginning new measurement.

- 19.871 Point for the W 1/16 section corner of sections 20 only; not monumented.
- 39.742 The corner of sections 19, 20, 29, and 30.

S. 89°20.8' W., between sections 19 and 30.

- 40.000 Point for the 1/4 section corner of sections 19 and 30, at proportionate distance; there is no remaining evidence of the original corner position.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 21 inches in the ground, magnet at base, in a mound of stone, 2 1/2 ft. base to top of aluminum cap marked:

T22S R1W
S19
1/4 —————
S30
2010

Set a steel fence post alongside the corner.

Corner is located on a moderately steep, south-facing rocky, open slope.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

Reestablishment of the Survey Executed by C. Mogo in 1856,
and the Resurveys Executed by A.D. Ferron in 1878,
and H.D. Page and G.C. Swan in 1897

59.469 Point for the W 1/16 section corner of sections 19 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, magnet at base, in a mound of stone, 1 1/2 ft. base to top of aluminum cap marked:

	S19
W 1/16	———
	S30
	2010

Set a steel fence post alongside the corner.

Corner is located on open, level ground, north of Rocky Ford dam.

78.938 The corner of sections 19, 24, 25, and 30, on the west boundary of the township, hereinbefore described.

Reestablishment of the Survey Executed by A.D. Ferron in 1878

From the corner of sections 19, 20, 29, and 30.

N. 1°51.5' E., between sections 19 and 20.

22.618 Point for the S 1/16 section corner of sections 19 and 20; not monumented.

45.236 The 1/4 section corner of sections 19 and 20; there is no remaining evidence of the original corner position. Found a mound of stone, 2 ft. base by 1 1/2 ft. high, with lathe stuck in mound (Record: a trachyte stone, 11x9x7 inches, set 7 inches in the ground, marked 1/4 on west face, with stone mound).

Note: This mound of stone, as described by the Utah Department of Transportation, Sigard to Salina Right of Way Plan, Sheet 10, dated 05/27/1981, as a record tie to the corner of sections 17, 18, 19, and 20, is accepted as the best available evidence of the original corner position.

At the corner (center of mound of stone)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, to bedrock, magnet at base, in a mound of stone, 3 ft. base to top of brass cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T22S R1W

1/4
S19 | S20

2010

Set a steel fence post alongside the corner.

Corner is located on the northwest-facing bank of a drainage,
course northerly.

N. 0°27.6' E., beginning new measurement.

19.216 Point for the N 1/16 section corner of sections 19 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 21
inches in the ground, magnet at base, in a mound of stone, 3 1/2
ft. base to top of brass cap marked:

N 1/16
S19 | S20

2010

Set a steel fence post alongside the corner.

Corner is located on level, disturbed, and rocky ground.

38.432 True point for the corner of sections 17, 18, 19, and 20. Point
falls East, 8 links distance, from the left bank of the Sevier
River, 90 links wide, course N. 30° E., where it is subject to
destruction and impractical to establish a permanent monument.

From this true point, the witness corner to the corner of
sections 17, 18, 19, and 20, bears S. 88°39.9' W., 15.2 links
distance, monumented with a Sevier County survey monument, an
aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 6
inches above the ground, with aluminum cap marked SEVIER COUNTY
UTAH SURVEY MONUMENT T22S S18 S19 S20 S17 R1W 2008, with an arrow
pointing toward the point and WC and 10 FT marked along it.

This monument, as set by Sevier County, is accepted as the best
available evidence of the original corner position.

From the corner of sections 16, 17, 20, and 21.

S. 88°28.6' W., between sections 17 and 20.

20.652 Point for the E 1/16 section corner of sections 17 and 20; not
monumented.

41.304 Point for the 1/4 section corner of sections 17 and 20, at

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

proportionate distance; there is no remaining evidence of the original corner position. Point falls in a cultivated field, where it is not suitable for permanent monumentation; not monumented.

- 61.956** Point for the W 1/16 section corner of sections 17 and 20; not monumented.
- 82.608** The true point for the corner of sections 17, 18, 19, and 20.

Reestablishment of the Survey Executed by A.D. Ferron in 1878

S. 88°22.8' W., between sections 18 and 19.

- 39.734** The 1/4 section corner of sections 18 and 19, monumented with a Sevier County survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with aluminum cap marked SEVIER COUNTY UTAH SURVEY MONUMENT 1/4 S18 S19 T22S R1W 2008.

Note: This monument, as shown on the plat, Part of Township 22 South, Range 1 & 2 West, Salt Lake Base & Meridian, Dependent Resurvey, Sevier County, Utah 2008, by Magleby & Associates Inc., is harmoniously related to existing corners, and is accepted as a careful and faithful reestablishment of the original corner.

From the corner, an old fence extending N. 88° E. and S. 88° W, for a distance of less than 20 chains in either direction, bears South, 20.5 links distance.

Corner is located on the south side of a cultivated field with scattering Russian olive trees.

Reestablishment of the Survey Executed C. Mogo in 1856,
and the Resurvey Executed by A.D. Ferron in 1878

S. 88°23.9' W., beginning new measurement.

- 39.712** The true point for the corner of sections 13, 18, 19, and 24, on the west boundary, hereinbefore described.

THE SUBDIVISION OF SECTION 19,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

The Subdivision of Section 19,
T. 22 S., R. 1 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 19 and 30.

N. 01°24.7' E., on the N-S centerline of section 19.

- 43.170** Point for the center 1/4 section corner, at intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 25 inches in the ground, magnet at base, with aluminum cap marked:

T22S R1W

C 1/4 S19

2010

Set a steel fence post alongside the corner.

From the corner, a barbed-wire fence, extending easterly and westerly, bears South, approximately 150 links distance.

Corner is located in pasture lands.

- 83.000** The 1/4 section corner of sections 18 and 19.

From the 1/4 section corner of sections 19 and 20.

S. 86°26.6' W., on the E-W centerline of section 19.

- 40.473** The center 1/4 section corner.

- 79.907** The 1/4 section corner of section 19 and 24, on the west boundary of the township, hereinbefore described.

The Subdivision of Section 20,
T. 22 S., R. 1 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 20 only.

N. 2°15.9' E., on the N-S centerline of section 20.

- 22.490** Point for the center S 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

THE SUBDIVISION OF SECTION 20,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

C
S 1/16 | S20
C
2010

Set a steel fence post alongside the corner.

Corner is located at the top of the north end of a bowl on a southwest-facing slope in rock outcrops.

- 44.980** Point for the center 1/4 section corner, at intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

T22S R1W
C 1/4 S20
2010

Set a steel fence post alongside the corner.

Corner is located on a steep, north-facing slope with blackbrush and sagebrush.

- 64.651** Point for the center N 1/16 section corner; not monumented.
84.322 Point for the 1/4 section corner of sections 17 and 20.

From the 1/4 section corner of sections 20 and 21.

S. 89°41.4' W., on the E-W centerline of section 20.

- 22.062** Point for the center E 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

E 1/16
C ——— C
S20
2010

Set a steel fence post alongside the corner.

Corner is located on a steep, west-facing rocky slope.

- 44.124** The center 1/4 section corner.

THE SUBDIVISION OF SECTION 20,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

64.107 Point for the center W 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a mound of stone, 2 1/2 ft. base to top of aluminum cap marked:

W 1/16
C ——— C
S20
2010

Set a steel fence post alongside the corner.

From the corner, a fence on the southerly right-of-way of Interstate Highway 70, extending N. 75° W., and S. 75° E., bears North, approximately 300 links distance.

Corner is located on a northwest-facing slope with scattered sagebrush and boulders.

84.090 The 1/4 section corner of sections 19 and 20.

From the center E 1/16 of section 20.

N. 0°15.6' E., on the N-S centerline of the NE 1/4 of section 20.

19.871 Point for the NE 1/16 section corner, at intersection with the E-W centerline of the NE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, magnet at base, in a mound of stone, 1 1/2 ft. base to top of aluminum cap marked:

NE 1/16 S20
2010

Set a steel fence post alongside the corner.

From the corner, a fence on a county frontage road right-of-way, extending N. 50° E., and S. 50° W., bears South, approximately 170 links distance.

Corner is located on level ground in a previously cultivated area.

39.742 Point for the E 1/16 section corner of sections 17 and 20.

From the N 1/16 section corner of sections 20 and 21.

S. 89°06.2' W., on the E-W centerline of the NE 1/4 of section 20.

THE SUBDIVISION OF SECTION 20,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

21.335 The NE 1/16 section corner.

42.670 Point for the center N 1/16 section corner of section 20.

From the point for the E 1/16 section corner of section 20 only.

N. 4°54.9' E., on the N-S centerline of the SE 1/4 of section 20.

22.533 Point for the SE 1/16 section corner, at intersection with the E-W centerline of the SE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

SE 1/16 S20

2010

Set a steel fence post alongside the corner.

Corner is located on a north-facing slope at the base of a canyon opening to the north.

45.066 The center E 1/16 section corner of section 20.

From the point for the S 1/16 section corner of sections 20 and 21.

S. 89°36.8' W., on the E-W centerline of the SE 1/4 of section 20.

20.981 The SE 1/16 section corner.

41.962 The center S 1/16 section corner of section 20.

From the point for the W 1/16 section corner of section 20 only.

N. 2°03.7' E., on the N-S centerline of the SW 1/4 of section 20.

22.554 Point for the SW 1/16 section corner, at intersection with the E-W centerline of the SW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

SW 1/16 S20

2010

Set a steel fence post alongside the corner.

THE SUBDIVISION OF SECTION 20,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located on a steep, north-facing slope with scattered sagebrush and lava rock slides.

45.108 The center W 1/16 section corner of section 20.

From the center S 1/16 section corner of section 20.

S. 89°29.9' W., on the E-W centerline of the SW 1/4 of section 20.

19.947 The SW 1/16 section corner.

39.894 Point for the S 1/16 section corner of sections 19 and 20.

From the center W 1/16 section corner of section 20.

N. 1°22.4' E., on the N-S centerline of the NW 1/4 of section 20.

19.441 Point for the NW 1/16 section corner, at intersection with the E-W centerline of the NW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

NW 1/16 S20

2010

Set a steel fence post alongside the corner.

From the corner, the centerline of an irrigation ditch, 3 ft. wide, 2 ft. deep, course westerly, bears North, 24 links distance.

Corner is located near the base of a north-facing slope with sagebrush.

38.882 Point for the W 1/16 section corner of sections 17 and 20.

From the point for the center N 1/16 section corner of section 20.

S. 89°04.5' W., on the E-W centerline of the NW 1/4 of section 20.

20.336 The NW 1/16 section corner section corner.

40.672 The N 1/16 section corner of sections 19 and 20.

THE SUBDIVISION OF SECTION 30,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

The Subdivision of Section 30,
T. 22 S., R. 1 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 30 and 31.

N. 01°19.6' W., on the N-S centerline of section 30.

20.616 Point for the center S 1/16 section corner. Point falls in Rocky Ford Reservoir; no permanent monumentation established.

41.232 Point for the center 1/4 section corner, at intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, magnet at base, in a mound of stone, 1 1/2 ft. base to top of aluminum cap marked:

T22S R1W

C 1/4 S30

2010

Set a steel fence post alongside the corner.

From the corner, the centerline of an unimproved dirt road, 12 ft. wide, extending S. 25° E., and N. 25° W, bears East, 22.7 links distance.

Corner is located on level ground with blackbrush.

61.839 Point for the center N 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, magnet at base, in a mound of stone, 2 1/2 ft. base to top of aluminum cap marked:

C
N 1/16 | S30

C

2010

Set a steel fence post alongside the corner.

Corner is located on a gentle northwest-facing slope on open ground.

82.446 The 1/4 section corner of sections 19 and 30.

From the east 1/4 section corner of section 30 only.

N. 89°53.3' W., on the E-W centerline of section 30.

THE SUBDIVISION OF SECTION 30,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 39.006** The center 1/4 section corner.
- 58.689** Point for the center W 1/16 section corner. Point falls in Rocky Ford reservoir; no permanent monumentation established.
- 78.372** Point for the 1/4 section corner of sections 25 and 30.

From the W 1/16 section corner of sections 30 and 31.

N. 1°02.2' W., on the N-S centerline of the SW 1/4 of section 30.

- 10.950** Point selected for a witness point on the N-S centerline of the SW 1/4 of section 30.

Note: This witness point defines the N-S centerline of the SW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, magnet at base, with aluminum cap marked:

WP
C
SW 1/4 | S30
C
2010

Set a steel fence post alongside the corner.

From the corner, the bank of Rocky Ford reservoir, extending West and N. 70° E., bears North, approximately 26 links distance.

Corner is located on level, open ground.

- 20.480** Point for the SW 1/16 section corner, at intersection with the E-W centerline of the SW 1/4. Point falls in Rocky Ford reservoir; no permanent monumentation established.
- 40.960** Point for the center W 1/16 section corner of section 30.

From the point for the center S 1/16 section corner of section 30.

N. 89°30.0' W., on the E-W centerline of the SW 1/4 of section 30.

- 19.794** The SW 1/16 section corner.
- 39.588** Point for the S 1/16 section corner of sections 25 and 30, on the west boundary of the township, hereinbefore described.

From the point for the center W 1/16 section corner of section

THE SUBDIVISION OF SECTION 30,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

30.

N. 1°02.3' W., on the N-S centerline of the NW 1/4 of section 30.

20.475 Point for the NW 1/16 section corner, at intersection with the E-W centerline of the NW 1/4. Point falls in Rocky Ford reservoir; no permanent monumentation established.

40.950 The W 1/16 section corner of sections 19 and 30.

From the center N 1/16 section corner of section 30.

S. 89°44.0' W., on the E-W centerline of the NW 1/4 of section 30.

7.648 Point selected for a witness point on the E-W centerline of the NW 1/4.

Note: This witness point defines the E-W centerline of the NW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 26 inches in the ground, magnet at base, with aluminum cap marked:

WP
NW 1/4
C ——— C
S30
2010

Set a steel fence post alongside the corner.

Corner is located on level ground, 6 links distance easterly of a tree line, on the east side of Rocky Ford reservoir.

19.577 The point for the NW 1/16 section corner.

39.154 Point for the N 1/16 section corner of sections 25 and 30, on the west boundary of the township, hereinbefore described.

The Subdivision of Section 31,
T. 22 S., R. 1 W., Salt Lake Meridian, Utah

From the 1/4 section corner of section 31 only, on the south boundary of the township, hereinbefore described.

N. 01°04.8' E., on the N-S centerline of section 31.

20.399 Point for the center S 1/16 section corner; not monumented.

40.798 Point for the center 1/4 section corner, at intersection with the E-W centerline.

THE SUBDIVISION OF SECTION 31,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, magnet at base, with aluminum cap marked:

T22S R1W

C 1/4 S31

2010

Set a steel fence post alongside the corner.

Corner is located on open, level ground.

61.215 Point for the center N 1/16 section corner; not monumented.

81.632 The 1/4 section corner of sections 30 and 31.

From the east 1/4 section corner of section 31 only.

N. 88°52.1' W., on the E-W centerline of section 31.

19.872 Point for the center E 1/16 section corner; not monumented.

38.845 The center 1/4 section corner.

58.099 Point for the center W 1/16 section corner; not monumented.

77.353 The 1/4 section corner of sections 31 and 36, on the west boundary of the township, hereinbefore described.

From the W 1/16 section corner of section 31 only, on the south boundary of the township, hereinbefore described.

N. 01°03.6' E., on the N-S centerline of the S 1/2 of the SW 1/4 of section 31.

20.363 Point for the SW 1/16 section corner of the S 1/2 of the SW 1/4, at intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

W-SW 1/16 S31

2010

Set a steel fence post alongside the corner.

Corner is located on open, level ground.

From the point for the SW 1/16 section corner of the N 1/2 of the SW 1/4, on the E-W centerline of the SW 1/4.

THE SUBDIVISION OF SECTION 31,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, magnet at base, in a mound of stone, 1 1/2 ft. base to top of aluminum cap marked:

E-SW 1/16 S31

2010

Set a steel fence post alongside the corner.

Corner is located on open, level ground.

N. 00°10.1' E., on the N-S centerline of the N 1/2 of the SW 1/4 of section 31.

20.368 Point for the center W 1/16 section corner.

From the point for the center S 1/16 section corner of section 31.

N. 88°45.8' W., on the E-W centerline of the SW 1/4 of section 31.

18.932 The SW 1/16 section corner of the N 1/2 of the SW 1/4.

19.887 The SW 1/16 section corner of the S 1/2 of the SW 1/4.

37.864 The S 1/16 section corner of sections 31 and 36, on the west boundary of the township, hereinbefore described.

From the point for the center W 1/16 section corner.

N. 0°10.1' E., on the N-S centerline of the NW 1/4 of section 31.

20.377 Point for the NW 1/16 section corner, at intersection with the E-W centerline of the NW 1/4.

Set an aluminum post, 30 inches long 2 1/2 inches diameter, 27 inches in the ground, magnet at base, with aluminum cap marked:

NW 1/16 S31

2010

Corner is located on open, level ground.

40.754 The W 1/16 section corner of sections 30 and 31.

From the point for the center N 1/16 section corner.

N. 88°59.4' W., on the E-W centerline of the NW 1/4 of section 31.

THE SUBDIVISION OF SECTION 31,
TOWNSHIP 22 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

19.577 The NW 1/16 section corner.

39.154 Point for the N 1/16 section corner of sections 31 and 36, on the
west boundary of the township, hereinbefore described.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGMENT

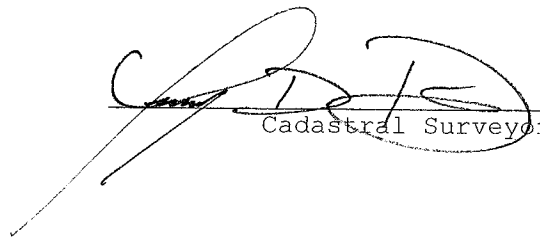
FIELD ASSISTANTS

Name	Capacity
<hr/>	
Daniel W. Webb	Chief Cadastral Surveyor
Ronald K. Baugh	Supervisory Cadastral Surveyor
Jacob Murdoch	Survey Aid
Jeremy D. Davis	Cadastral Surveyor

CERTIFICATE OF SURVEY

I, *Jeremy D. Davis*, Cadastral Surveyor, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of *July 28, 2010*, and Reassignment Instructions bearing the date of *November 4, 2011*, I have *dependently resurveyed a portion of the south and west boundaries, a portion of the subdivision, and the subdivision of sections 19, 20, 30, and 31, in T. 22 S., R. 1 W., of the Salt Lake Meridian, in the state of Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 26, 2012
Date

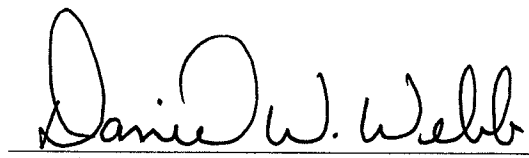

Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the south and west boundaries, a portion of the subdivision, and the subdivision of sections 19, 20, 30, and 31 in T. 22 S., R. 1 W., of the Salt Lake Meridian, in the state of Utah*, executed by *Jeremy D. Davis, Cadastral Surveyor*, having been critically examined and found correct, are hereby approved.

January 17, 2013
Date


(Chief Cadastral Surveyor for Utah)